



1 2 3 4 5 6 7 8 9

F

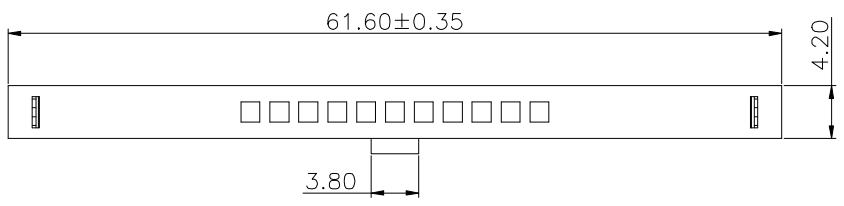



Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:Thermoplastic, UL 94V-0
 PBT or the equivalent material
 All materials must meet Greenconn
 hazardous substances control standards.

E

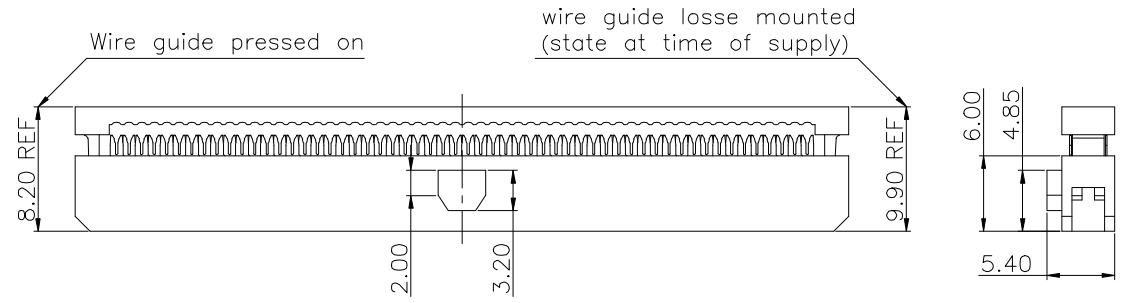

D

C

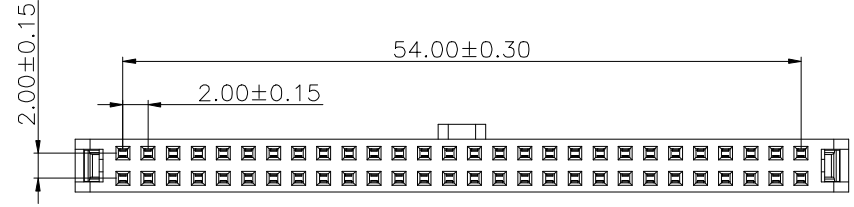

B

Ordering Information

C QFZ201 - XX XX A 001 K X S X
 No. of Pins per Row 28
 Standard Plating 38=10u" gold on contact /matte tin on tail
 Color 1=Black
 Standard Packing B=Tray

A

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGEND:	DATE:
APPROVED:	DATE:

DWG. NO. CQFZ201-CA1KS
PART NO. CQFZ201-XXXXA001K1SX

TITLE.
 2.00 Pitch IDC Female
 Connector Type B with
 Locking Latches

1 2 3 4 5 6 7 8 9